

Kent Criss-Cross Demarcation Stud



KENT CRISS CROSS DEMARCATION STUD (KCCDS 25)

Specify:

Kent Criss Cross Demarcation Stud (KCCDS 25); Grade 316 Stainless Steel; Dia: 0.98" (25mm), Height: 0.19" (5mm); 1nr 0.39" (10mm) dia x 0.70" (18mm) high studs, Polished Finish;

Description:



Kent Criss Cross Demarcation Stud is an anti-slip variation of the Kent Demarcation Stud. It is used to de-lineate walkways and site boundaries. The disc lies 5mm above the surface once installed. It is manufactured using Grade 316L Stainless Steel, this material is perfect for high-traffic pedestrian areas. It has an overall diameter of 25mm

Features:

- Grade 316 Stainless steel
- 5mm Thick Steel
- 25mm dia Disc
- Criss Cross Anti Slip Disc
- Polished Finish
- 1 Installation pins



KENT CRISS CROSS DEMARCATION STUD (KCCDS 25)

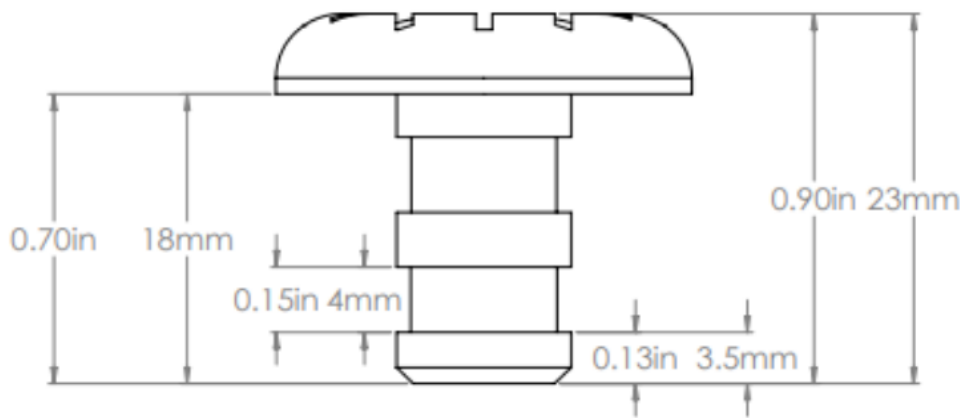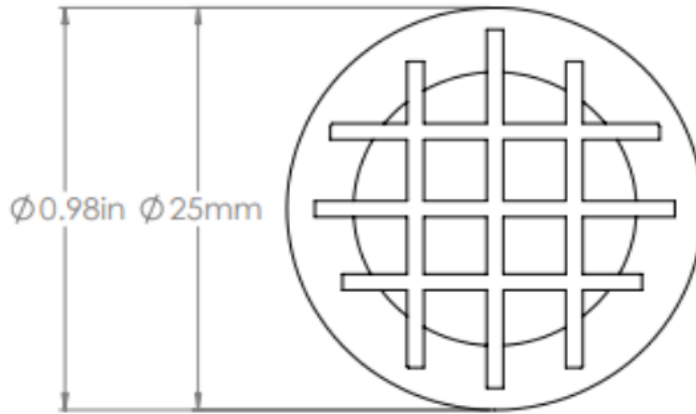

Product Code	Diameter	Height
Kent Criss Cross Demarcation Stud KCCDS 25	0.98" (25mm)	0.19" (5mm)
* Kent Criss Cross Demarcation Stud KCCDS 35	1.37" (35mm)	0.10" (5mm)

* - Not the stock version

Installation of Studs

Step 1:

Drill x1 0.47" (12mm) Diameter hole 0.78" (20mm) deep.

Step 2:


Clean out the drilled hole.

Step 3:

Fill with chemical mortar (Kent Stainless recommend MIT-SE Mortar).

Step 4:

Insert the Kent Criss Cross Demarcation Stud and leave to set for 24 hours

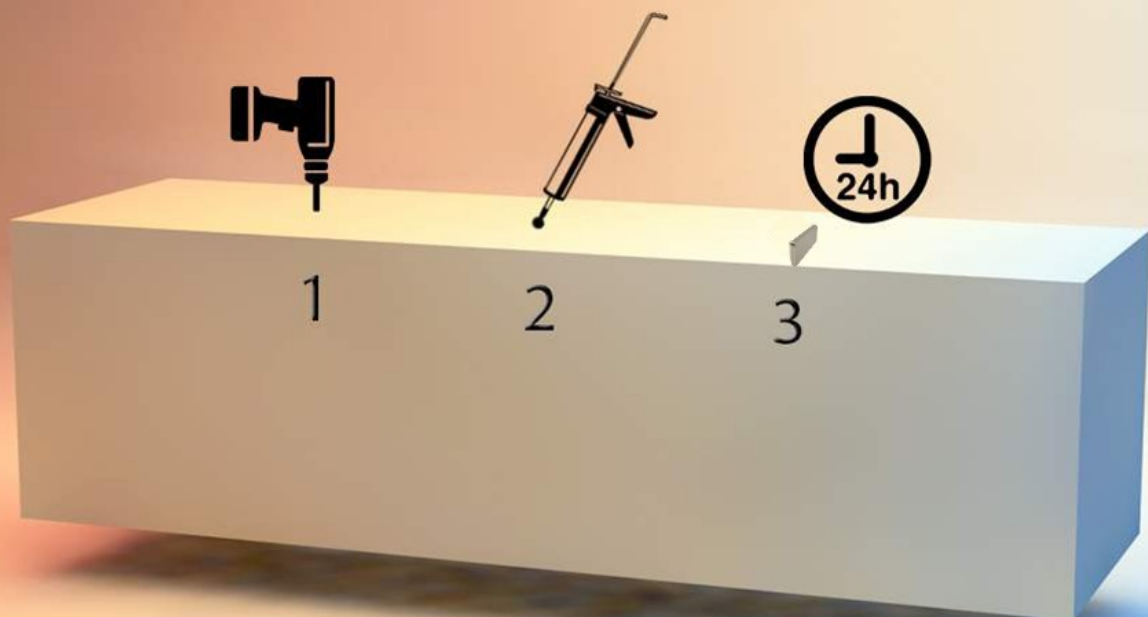

KENT CRISS CROSS DEMARICATION STUD (KCCDS 25)

Specify

Choose your steel:
Grade 304 Stainless steel
Grade 316 Stainless steel

Specify:

Kent Criss Cross Demarcation Stud (KCCDS 25); Grade 316 Stainless Steel; Dia: 0.98" (25mm), Height: 0.19" (5mm); 1nr 0.39" (10mm) dia x 0.70" (18mm) high studs, Polished Finish;

Choose your Size:
Standard 25mm dia
Bespoke 35mm dia



Maintenance of Stainless Steel


Clean the stainless steel components using warm water with a mild detergent with a non-abrasive cloth or sponge. Heavier stains may require the use of a nylon-scouring pad or a stainless steel cleaner.

To remove paint or graffiti use a cloth and Alkaline or solvent paint strippers according to type of paint. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action with a cloth.

In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain using soap and warm water.

Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particularly in areas where construction work has been undertaken. Such stains can be removed using Rust Remover 410.

In cases where the surface is severely stained because of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finish using chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish.

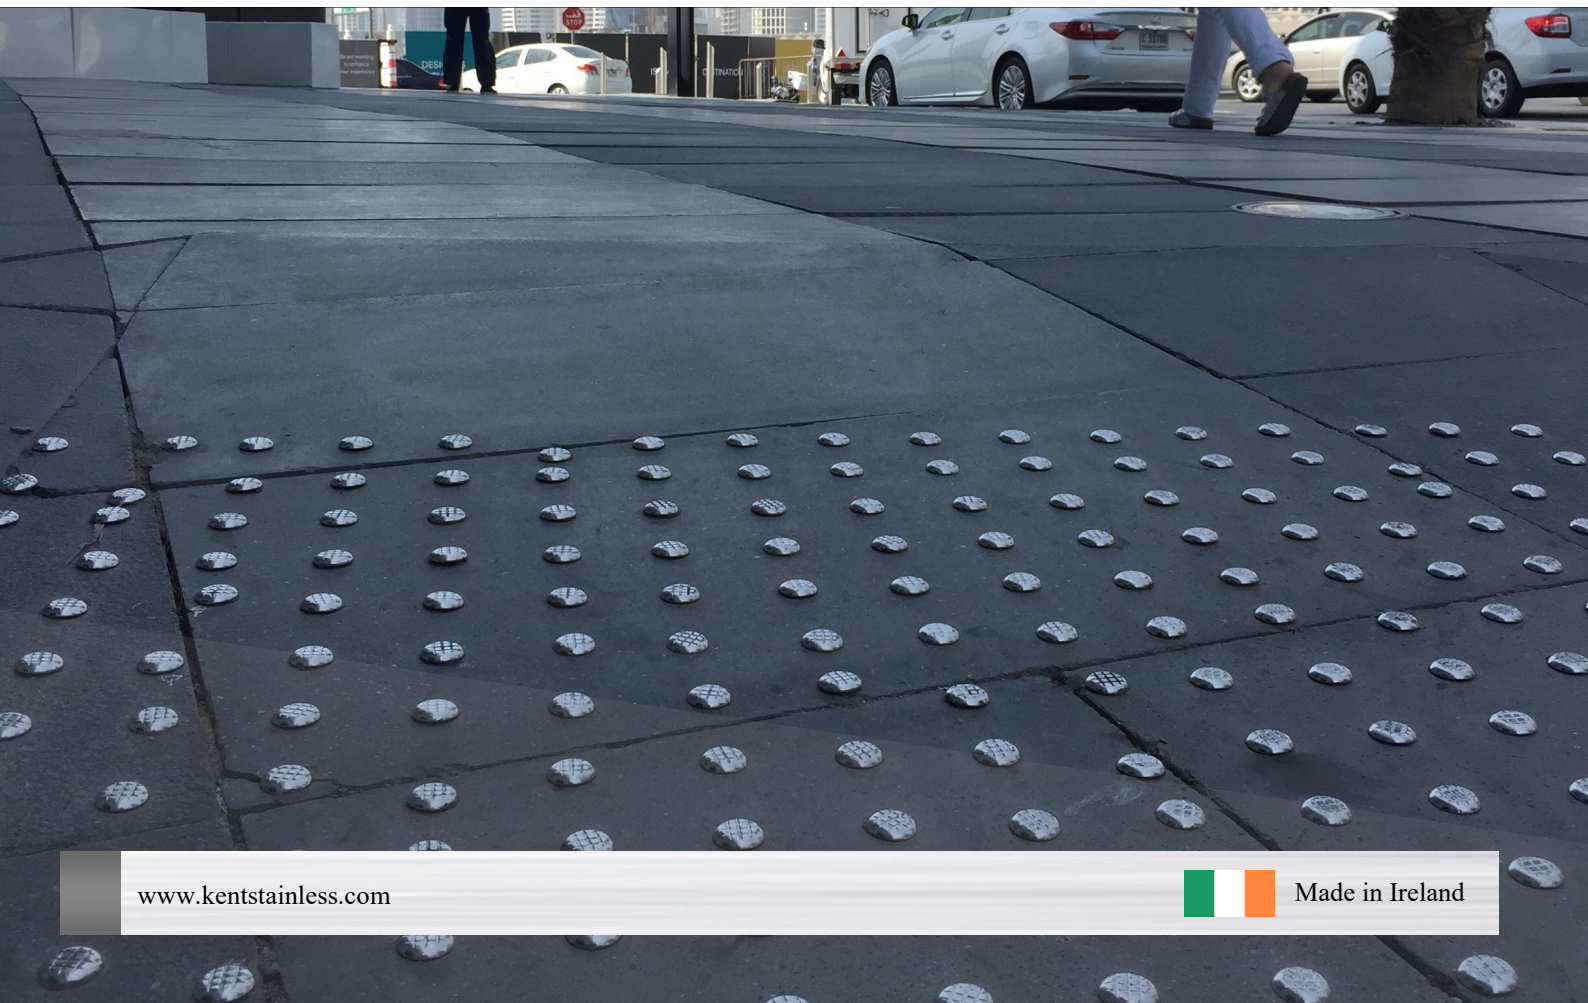



Kent Stainless Ltd
Ardcavan, Wexford, Ireland

TEL NO: +353 53 9143216
UK FREEPHONE: 0800 376 8377
FAX: +353 53 9141802
WEB: www.kentstainless.com
EMAIL: info@kentstainless.com

