


Kent Tactile Warning Stud (Multi Groove)

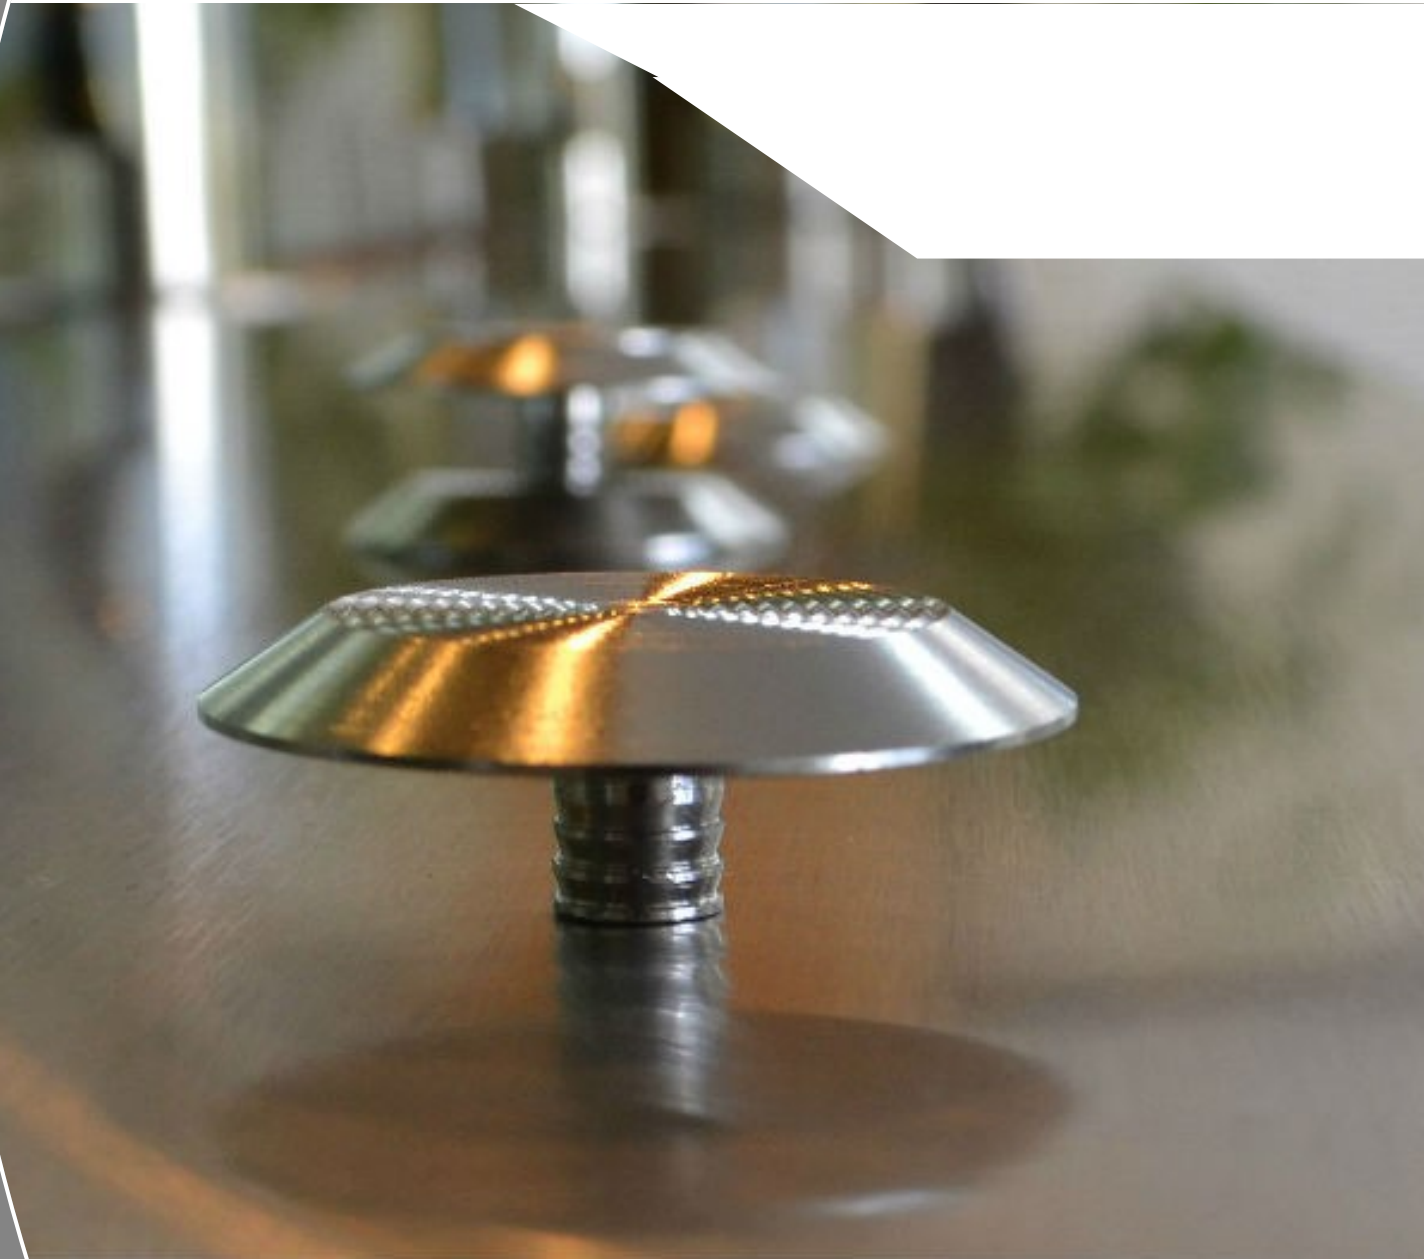

Specify:


Kent Tactile Warning Studs (Flat Domed & Mult Grooved) KTWS/35/5/FDMG; Grade 316L Stainless Steel; Satin Finish 320 Grit Polished.

The Kent Tactile Warning Studs provide an underfoot warning to identify hazards and dangerous areas where there is a change in levels or where there is an unprotected opening such as open stairwells and platforms.


The stainless steel material is ideal for high-traffic pedestrian areas. The slip resistant design ensures the studs do not themselves become a hazard in wet or cold conditions.

Features:

- Grade 316 Stainless steel
- Underfoot warning to identify hazards and dangerous areas.
- Easy Installation
- Slip resistant design

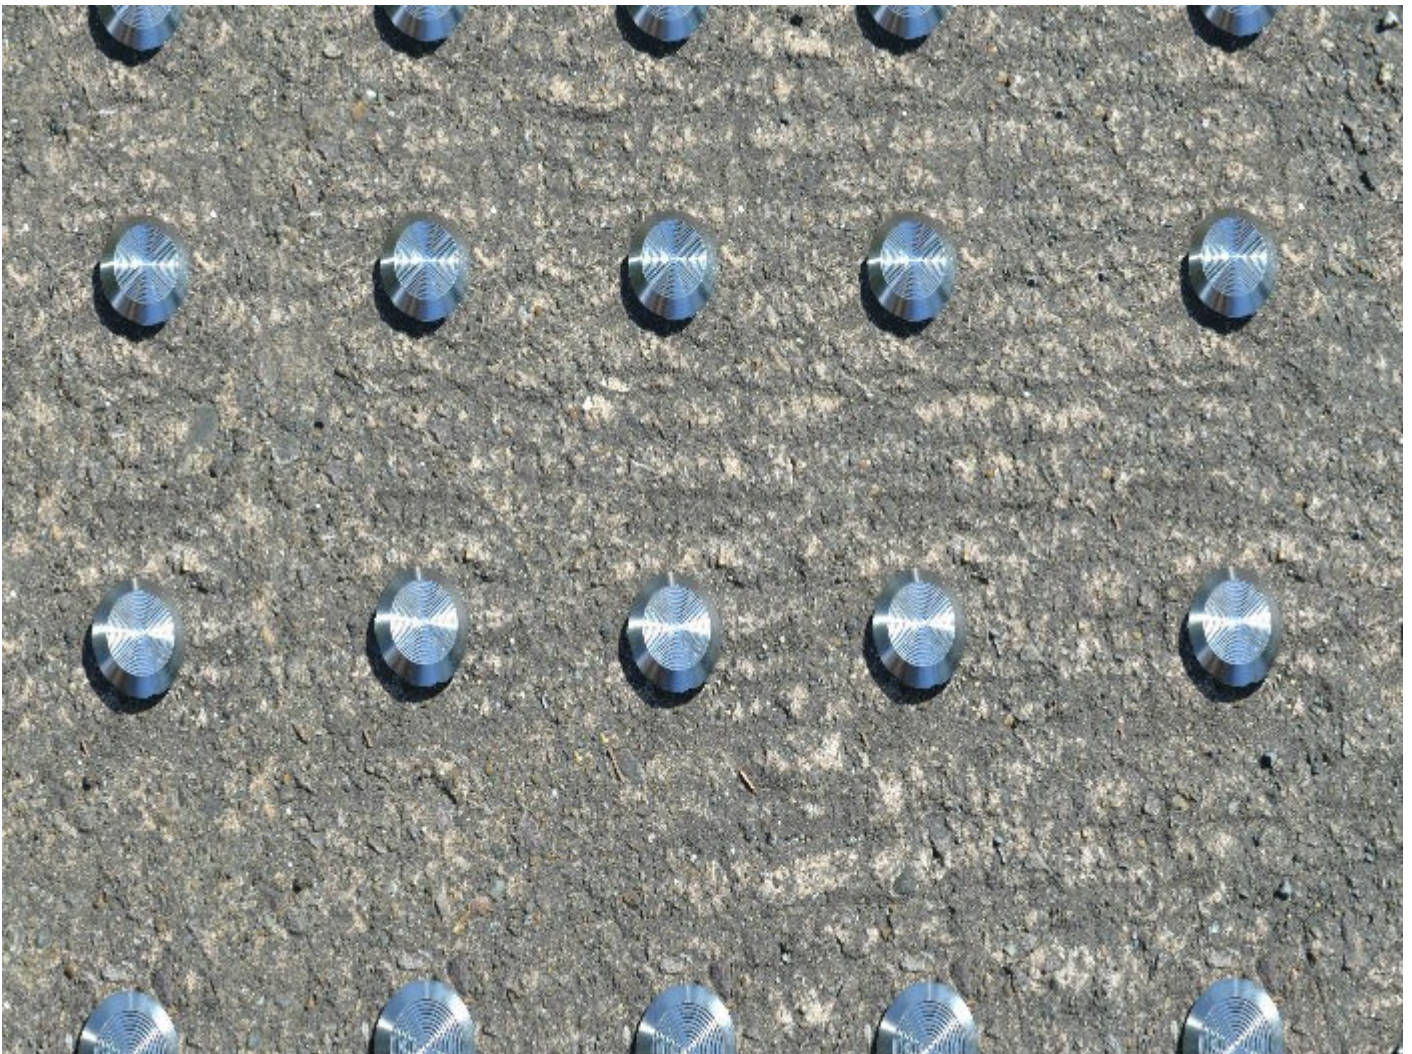

KENT TACTILE WARNING STUD (MULTI GROOVE)KTWD 35/5FDMG

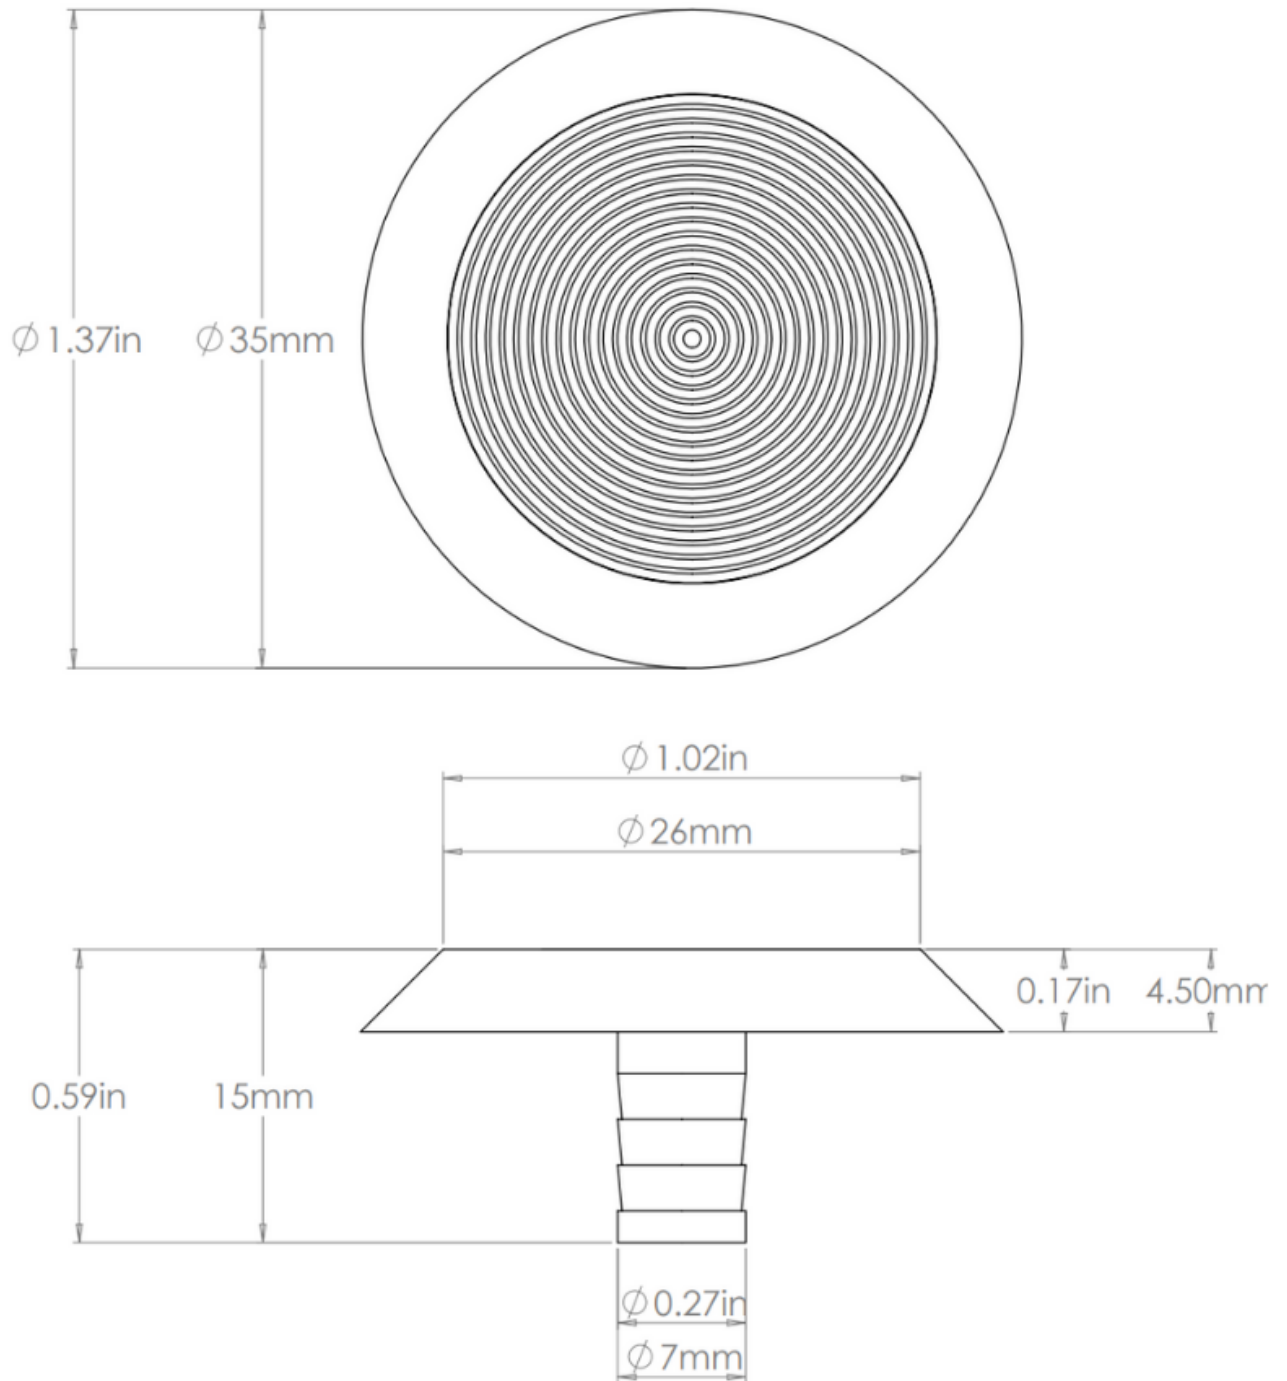

Installation of Studs

Step 1:

Drill a 0.59" (15mm) Diameter hole 1.18" (30mm) deep.

Step 2:


Clean out the drilled hole.

Step 3:

Fill with chemical mortar (Kent Stainless recommend MIT-SE Mortar).

Step 4:

Insert Stud and leave to set for 24 hours

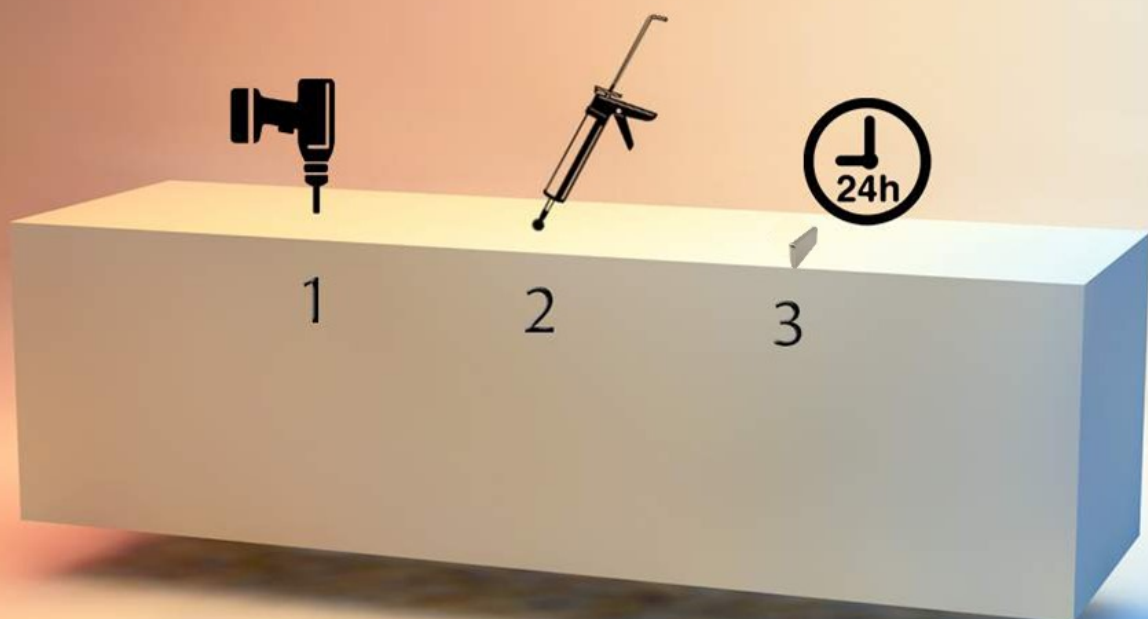

Maintenance of Stainless Steel

The Kent tactile warning is constructed from 316L grade stainless steel .The external finish of the stud is Satin finish in a circular pattern. Despite the material's corrosion resistant properties some care is required to maintain a bright appearance. The conditions that the studs are in (Inland or Coastal area), will greatly increase its need for cleaning and care.

Clean the stainless steel components using warm water with a mild detergent with a non-abrasive cloth or sponge. Heavier stains may require the use of a nylon-scouring pad or a stainless steel cleaner. To remove paint or graffiti use a cloth and Alkaline or solvent paint strippers according to type of paint. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action with a cloth. In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain using soap and warm water. Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particularly in areas where construction work has been undertaken. Such stains can be removed using Rust Remover 410. In cases where the surface is severely stained because of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finishing using chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish. We recommend Mister Stainless Ltd. as a provider for stainless steel cleaning products.

Kent Stainless Ltd

Ardcavan, Wexford, Ireland

TEL NO: +353 53 9143216
UK FREEPHONE: 0800 376 8377
FAX: +353 53 9141802
WEB: www.kentstainless.com
EMAIL: info@kentstainless.com

