

Kent Internal Factory Bollard



KENT INTERNAL FACTORY BOLLARD


Kent Stainless Internal Factory Bollard is ideal for a wide range of food factories.

The Standard 3.97" (101mm) dia version stands at 39.37" (1000mm) high with a surface mounted base plate. Its grade 304 stainless steel material along with its 320 grit satin finish gives it a great resistance to air pollutants as well as general dust and grime.

This bollard can come in larger diameters and also can come in various cap styles. Reflective strips options also available.


Features:

- 0.11" (3mm) thick steel
- 320 grit satin finish
- Various Cap styles, Dome as standard
- Grade 304L stainless steel as standard

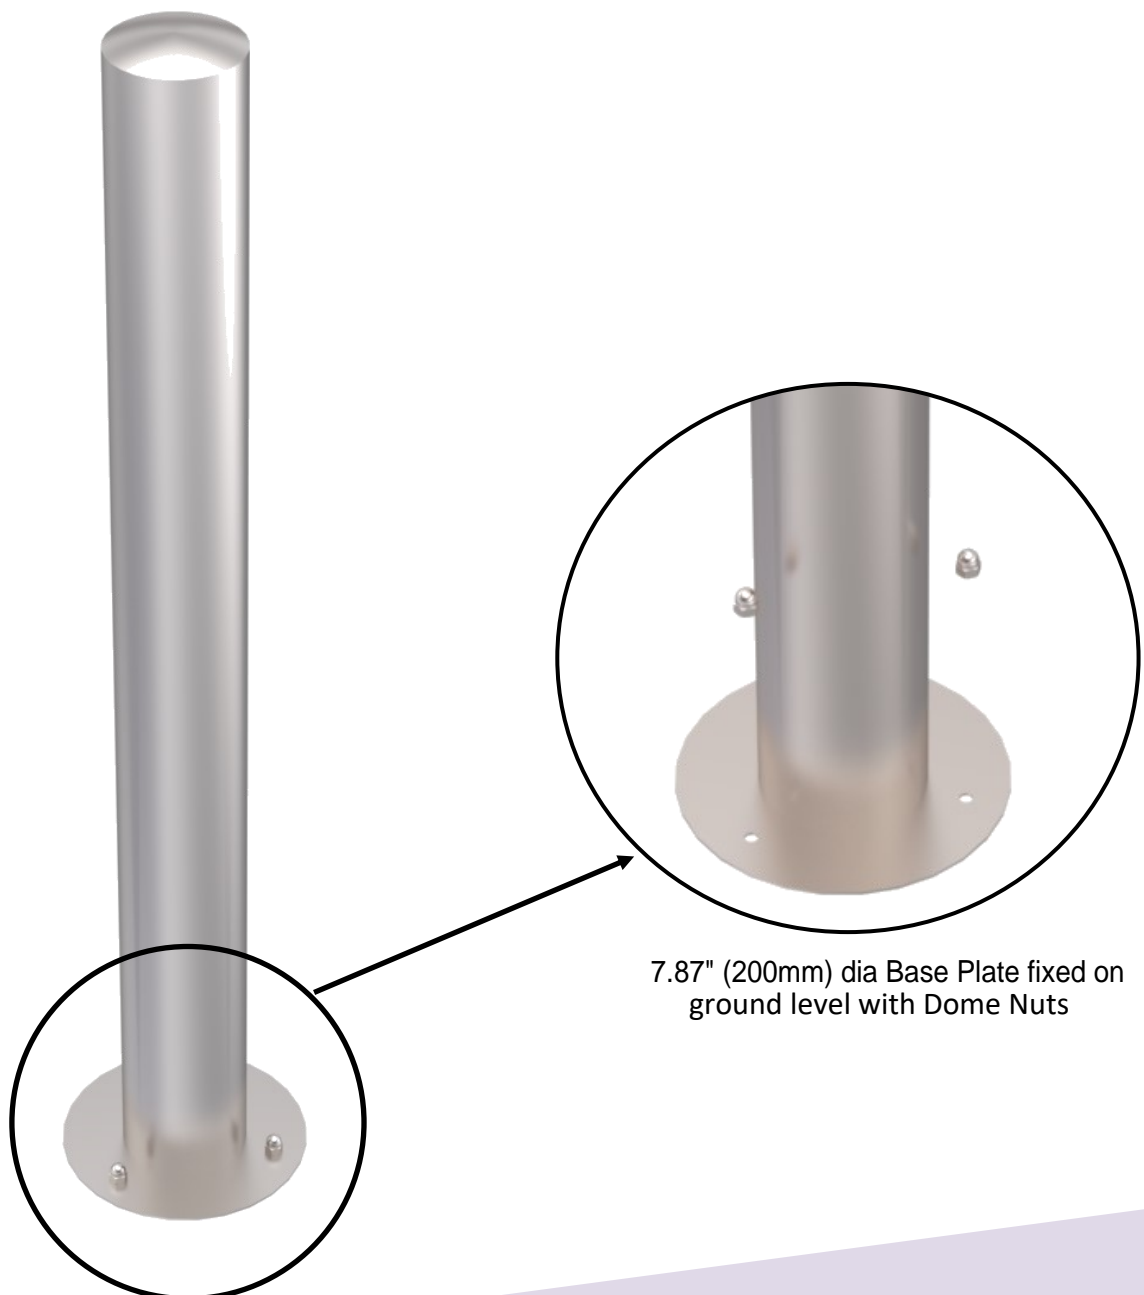

7.87" (200mm) dia Base Plate fixed on ground level with Dome Nuts

KENT INTERNAL FACTORY BOLLARD

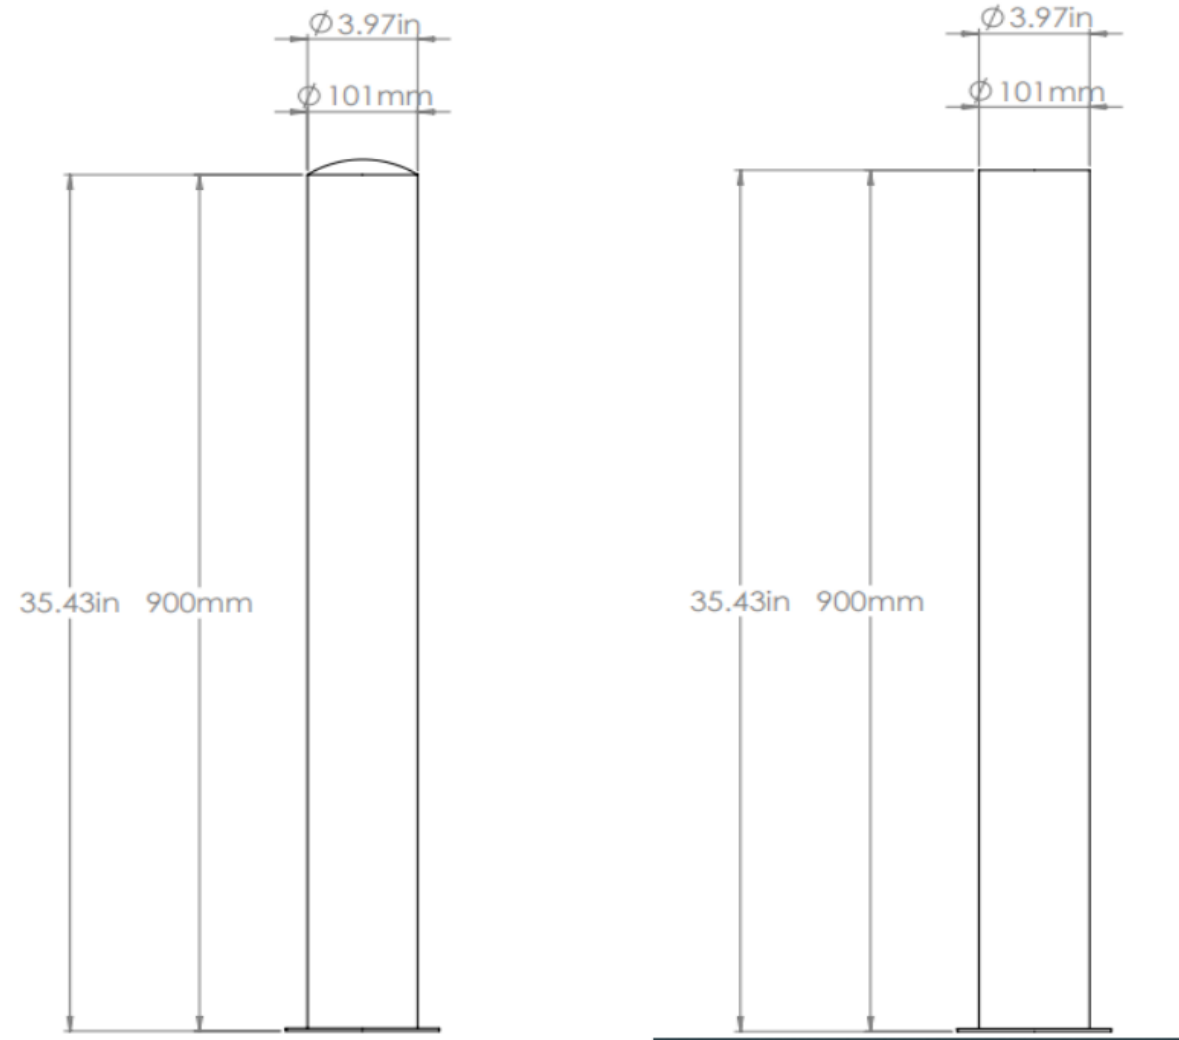

Product Code	Height	Diameter
Kent Internal Factory Bollard KIFB-101	39.37" (1000mm)	3.97" (101mm)
Kent Internal Factory Bollard KIFB-114	39.37" (1000mm)	4.48" (114mm)
Kent Internal Factory Bollard KIFB-168	39.37" (1000mm)	6.61" (168mm)

Specify

Choose your steel:
Grade 304 Stainless steel
Grade 316 Stainless steel

Customise your size, or go with our standard 1000mm x 101mm dia
(See size chart **page 2** for dimensions)

Specify:

Kent Internal Factory Bollard (KIFB-101); Grade 304 Stainless Steel; H: 39.37" (1000mm), Dia: 3.97" (101mm), 0.11" (3mm) Thick Steel; Satin Finnish 320 Grit Polish; Visible Dome Fixings; Dome Top; No reflective strips.

Reflective Strips:
Stick on: 0.59" (15mm) or 0.98" (25mm)
Recessed: 0.59" (15mm) or 0.98" (25mm)
Various colours available

Bollard Cap Style:
Dome Top
Slope Top
Flat Top



Maintenance of Stainless Steel

Clean the stainless steel components using warm water with a mild detergent with a non-abrasive cloth or sponge. Heavier stains may require the use of a nylon-scouring pad or a stainless steel cleaner.

To remove paint or graffiti use a cloth and Alkaline or solvent paint strippers according to type of paint. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action with a cloth.

In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain using soap and warm water.

Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particularly in areas where construction work has been undertaken. Such stains can be removed using Rust Remover 410.

In cases where the surface is severely stained because of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finish using chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish.





Kent Stainless Ltd

Ardcavan, Wexford, Ireland

TEL NO: +353 53 9143216
UK FREEPHONE: 0800 376 8377
FAX: +353 53 9141802
WEB: www.kentstainless.com
EMAIL: info@kentstainless.com

