
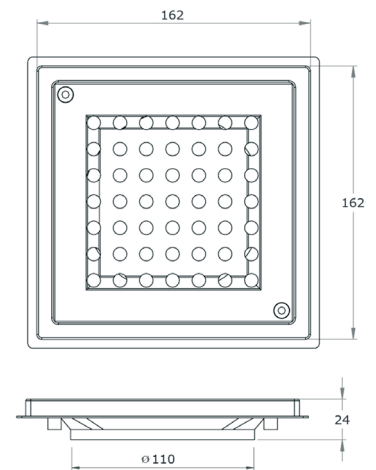


## KENT KF161 - Frame and Grating (Pedestrian)

The KF161 Gully Top is supplied as standard with a lockdown perforated grating and is trapped by a P Bend or S Bend elsewhere in the system. For trapped versions please see the KVT162/110TP gully. Use this gully for a low cost drain point where the outlet is trapped elsewhere.

### Features

- Grade 304 (1.4301) or 316 (1.4401) Stainless Steel to BS EN 10088
- 110mm diameter outlet (short pressed outlet)
- Satin finish as standard
- Ex stock
- Lock down as standard

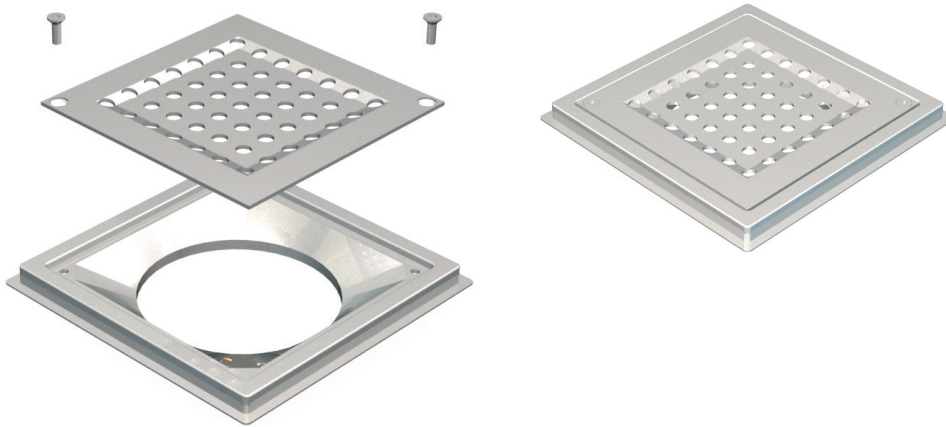

**Barefoot**



**Pedestrian**

Product Code	Height	Width	Depth	Outlet	Flow Rate
KF161	24	162	162	110	1.4l/s

**Specify Kent KF161 Floor Gully. 162mm x 162mm, floor drain. Grade 304 stainless steel with a satin polish finish.**

**BS EN1253  
Loading Class K3**