Kent Hidden Slot Drain









Specify:

Kent Hidden Slot Drain KHSC 125/200/30-10; Grade 316 SS; Hidden; 7.87" (200mm) overall height, 4.9" (125mm) width; 0.39" (10mm) slot;


Description:

Kent Hidden Slot Drain is a highly effective yet discreet drainage solution for public realm landscapes. The Slot is cut back from 3.93" (100mm) to 1.18" (30mm) which leaves the end result as an open slot with no visible stainless steel. The Kent Hidden Slot Drain System is made up of five different products; Kent Hidden Slot Channel, Recessed Access Cover, Outlet Point, Access Point and Connectors.


Kent Modular Slot Channel is manufactured in 39.37" (1000mm) lengths for stock which can easily be joined toerher on site using throat and collar connectors. Lengths can also be cut back on site to match exact lengths required on site.

Features:

- B125 loading as standard C250 & D400 versions also available
- Flexible modular system easy to handle and to cut back on site.
- Available in either Grade 304 or Grade 316
- 1.18" (30mm) Throat height,
 0.39" (10mm) internal slot
- 4.92" (125mm) or 6.88" (175mm) widths available
- Visible, Hidden or curved options available.

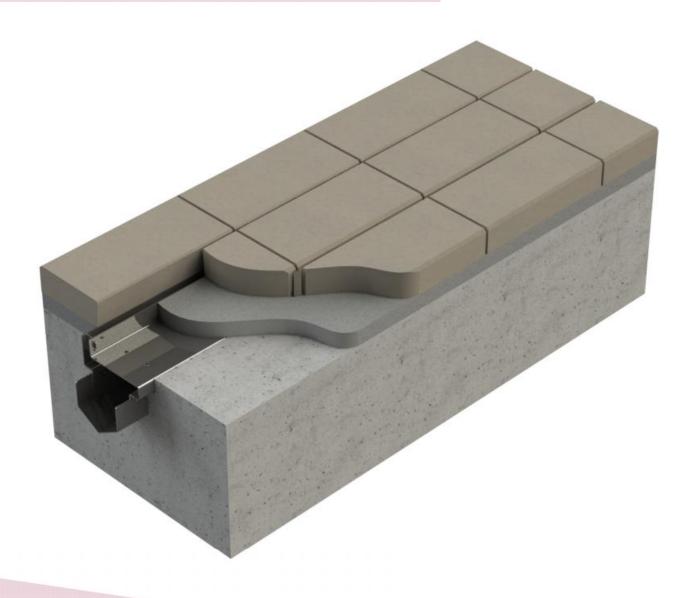



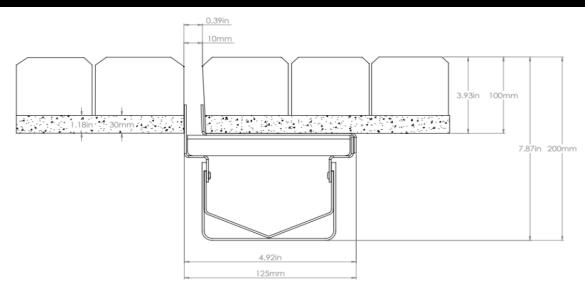


Product Code	Height	Width	Flow Rate
Kent Hidden Slot Channel KHSC125/200/30-10	7.87" (200mm)	4.92" (125mm)	2.3 L/s
Kent Hidden Slot Channel KHSC125/250/30-10	9.84" (250mm)	4.92" (125mm)	5.0 L/s
Kent Hidden Slot Channel KHSC125/300/30-10	11.81" (300mm) 4.92" (1	4.92" (125mm)	m) 8.0 L/s
Kent Hidden Slot Channel KHSC175/200/30-10	9.84" (250mm)	6.88" (175mm)	8.0 L/s
Kent Hidden Slot Channel KHSC175/250/30-10	11.81" (300mm)	6.88" (175mm)	13.0 L/s
Kent Hidden Slot Channel KHSC175/300/30-10	13.77" (350mm)	6.88" (175mm)	18.0 L/s


Slot Drain System Elements:

These products when combined make the Kent Slot Drain System.

We recommend the installation of an Recessed access box and either an outlet or access point every 12 meters to ensure cleaning of the drain is possible.

Connectors are used to join channels and access points and end caps are used to cut of the flow of water at the end of a run.

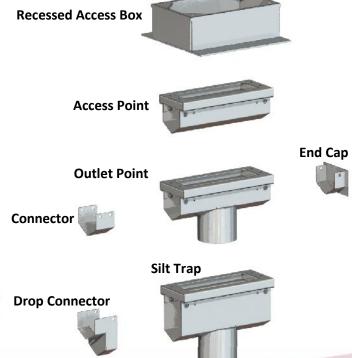


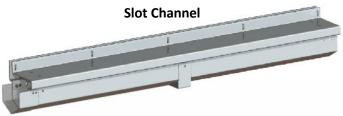



Installed Projects

Canada Water, London (UK) Kent Curved Slot Drain system

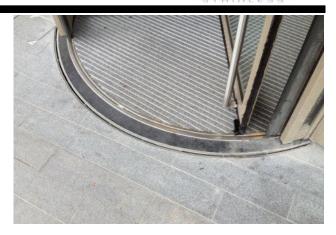

Cubitt Park, London (UK) Kent Visible Slot Drain installed for use in a water fountain



Bloomberg, London (UK) Kent Hidden Curved Slot Drain Installed in Bloomberg, London



Leadenhall, London Kent ecHidden Slot Drain Installed in Leadenhall, London





Specify

Choose you throat Hidden Visible

Customise your size:

To suit your projects needs or go with our standard 1000mm length x 125mm width x 200mm dept.

Specify:


Kent Hidden Slot Drain KSC 125/200/100-10; Hidden; Grade 316 SS; Straight; 7.87" (200mm) overall height, 4.92" (125mm) width; 0.39" (10mm) slot; FACTA B Loading

Customise your Loading:

FACTAA FACTA AA FACTA AAA FACTA B FACTA C FACTA D

Choose your steel:

Grade 304 Stainless steel Grade 316 Stainless steel

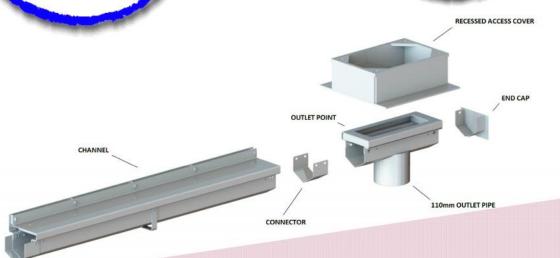

Options		
Curved		
Visible		
Hidden		
Grade 304 Stainless Steel		
Grade 316 Stainless Steel		

FACTA Class	EN124 Class	Slow Moving Wheel Loads	Kent Safety Test
А	A15	0.6T	0.8T
AA	N/A	1.5T	3.1T
AAA	N/A	2.5T	5.2T
В	B125	5T	10.1T
С	C250	6.5T	13.2T
D	D400	11T	22T



Maintenance of Stainless Steel

Clean the stainless steel components using warm water with a mild detergent with a non-abrasive cloth or sponge. Heavier stains may require the use of a nylon-scouring pad or a stainless steel cleaner.

To remove paint or graffiti use a cloth and Alkaline or solvent paint strippers according to type of paint. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action with a cloth.

In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain using soap and warm water.

Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particularly in areas where construction work has been undertaken. Such stains can be removed using Rust Remover 410.

In cases where the surface is severely stained because of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finish using chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish.

We recommend Mister Stainless Ltd. as a provider for stainless steel cleaning products.





Testimonials



"The In-house engineering completed by Kent Stainless and the Knowledge and advice given to finalise the design was outstanding"

- Parsons



"The client and the main contractor both were delighted with the quality of the work supplied by Kent Stainless"

- Skanska



" Because of the engineering know-how you provided and flexibility in design, we will certainly return to Kents for further work"

- Wexford County Council



