


Product Specification:



- Grade 304 stainless steel
- Satin finish 320 grit polished
- Easy Installation
- 0.11" (3mm) thick stainless steel
- Easy to Install
- Countersunk Fixings
- No dirt traps

Product Dimensions:

| Reference | Height | Width |
|-----------|-----------------|-----------------|
| KDB168 | 98.42" (2500mm) | 78.74" (2000mm) |

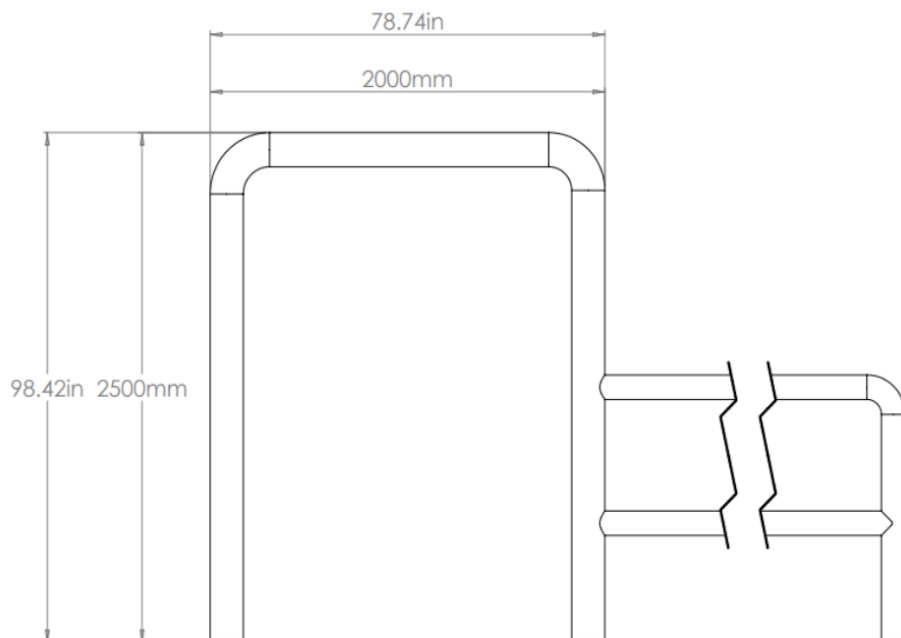

Options:

| Stainless Steel Grade | Finish | Thickness | Length |
|-----------------------|-------------------------------------|-------------|-----------------|
| 304 | Satin Finish 320 Grit Polished | 0.07" (2mm) | 47.24" (1200mm) |
| 316 | Electropolished | 0.11" (3mm) | 59.05" (1500mm) |
| | Bead Blasted | | 70.86" (1800mm) |
| | Bead Blashed & Electropolished | | |
| | 320 grit polished & Electropolished | | |
| | Powder Coated | | |

Overview:

Designed for areas where heavy duty loading traffic is prevalent. The door barriers are designed to withstand impact and to protect fragile doors, cladding and door surrounds. The barriers also provide protection for doorways from trolleys, mobile bin units and pallet trucks.

Maintenance:

Stainless Steel:

Clean the stainless steel components using warm water with a mild detergent with a non abrasive cloth or sponge. Heavier stains may require the use of a nylon scouring pad or a stainless steel cleaner. To remove paint or graffiti (or light concrete splashes) use a cloth and alkaline or solvent paint strippers according to type of paint.

For Satin Finish Stainless try to follow the direction of the grain when cleaning vigorously or polishing. For Bead Blasted Finish use a circular motion.

Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particularly in areas where construction work has been undertaken.

Where contamination of the stainless has occurred from ordinary mild steel coming into contact with the stainless, use Rust Remover 410. In cases where the surface is severely stained as a result of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finish using chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish. We recommend [Mister Stainless Ltd.](#) as a provider for stainless steel cleaning products