

KENT TRIPLE SEAL WATER TIGHT MANHOLE KMHT(W)-600/600

The Kent Triple Seal Water Tight Manhole is both odour and water tight. It contains 3 seals – a Gortex Seal, A Neoprene Seal and a Silicone Seal. All 3 seals make a positive connection and the manhole has locking points surrounding the perimeter to retain this positive seal. It is generally requested as grade 316L stainless steel for pharmaceutical factories, but 304L stainless is also available.

Note the large perimeter band on the frame giving a large visible frame.

Features


- ☐ Guaranteed water tight
- ☐ 3 standard sizes – but custom sizes are available
- ☐ Standard Loading FACTA B – A/B/C/D loadings available



KENT TRIPLE SEAL WATER TIGHT MANHOLE KMHT(W)-600/600 continued

Product Code	Clear Opening	Internal Tray Depth	Visible Frame Size
KMHT(W)-300/300	300mm x 300mm	80mm	555mm x 555mm
KMHT(W)-450/450	450mm x 450mm	80mm	705mm x 705mm
KMHT(W)-600/600	600mm x 600mm	80mm	855mm x 855mm
KMHT(W)-750/750	750mm x 750mm	80mm	1005mm x 1005mm
KMHT(W)-900/900	900mm x 900mm	80mm	1155mm x 1155mm


Specify: Kent Triple Seal Water Tight Manhole KMHT(W) 600/600; 600mm x 600mm clear opening; 80mm Tray Depth; Grade 316L Stainless Steel; Loading FACTA B
 See page 8 & 9 which shows how to create your own unique specification clause

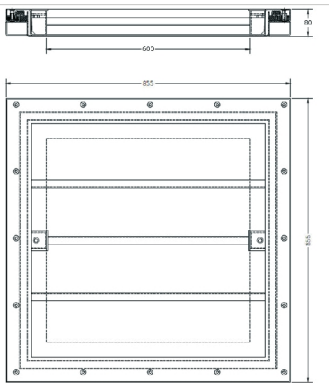

Silicone

Gortex

**Grease
(by contractor)**

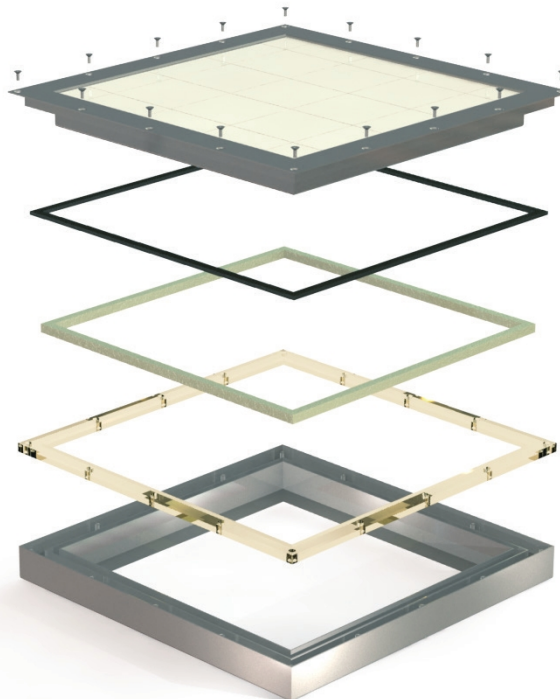

Sack Truck
Light/Medium Duty

Specify: FACTA AAA



Pallet Truck
Medium Duty

Specify: FACTA B



Forklift
Medium/Heavy Duty
(6.5 Ton)

Specify: FACTA C



Forklift
Heavy Duty (11 Ton)

Specify: FACTA D

OPTIONS

Grade 304L Stainless Steel

Grade 316L Stainless Steel

Fire Panels

FACTA Class	Slow Moving Wheel Loads	Kent Safety Test (Unfilled)
AAA	2.5T	5.2T
B	5T	10.1T
C	6.5T	13.2T
D	11T	22T